

Some of the many options for porous paving

WaterSmart development involves simple design and management practices that take advantage of natural site features and minimise impacts on the water cycle. It is part of the contemporary trend towards more 'sustainable' solutions that protect the environment and cost less.

This WaterSmart Practice Note describes how to design and install paving so that it manages and treats stormwater.

- **Asphalt porous paving**
- **Grid & modular paving**
- **Design & maintenance**



Paving

Introduction

Urbanisation causes a significant increase in the area covered with paved (or 'impervious') surfaces, such as roads, driveways, courtyards, etc. Paved surfaces have significant adverse impacts on the water cycle. They contribute to increased peak and total stormwater discharges, increased downstream flooding, streambank erosion, sewer surcharges, and the need for expensive 'big pipes' infrastructure to mitigate nuisance flooding. Paved areas also reduce the volume of rainwater that infiltrates to the subsoil

The impacts of paved surfaces on urban allotments can be reduced by:

- limiting the area of paved surfaces
- directing stormwater runoff from paved surfaces to landscaped areas, gardens and lawns rather than to the street drainage system
- using porous paving systems.

The application of these methods to a typical residential allotment is shown in Figure 1.

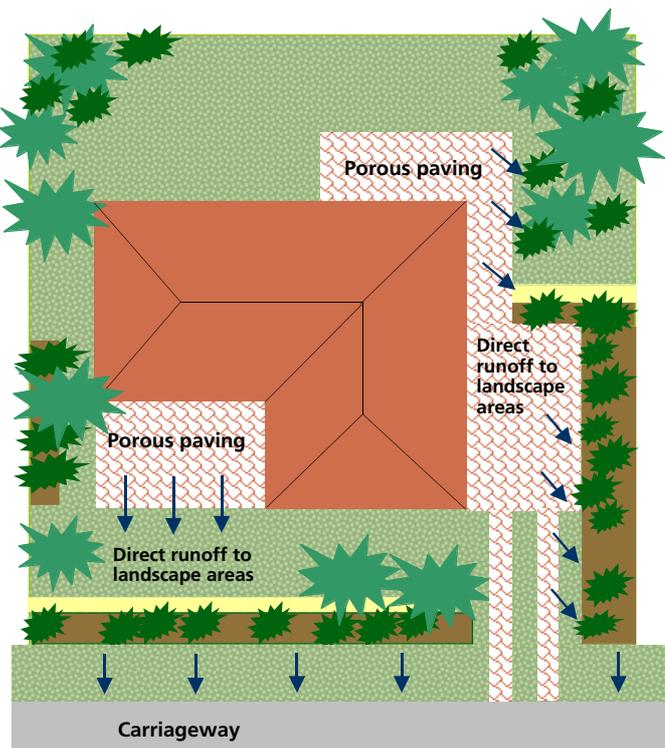


Fig 1: Paving strategy for typical suburban lot

What is porous paving?

Porous paving is an alternative to conventional impermeable pavements with many stormwater management benefits. These surfaces allow water to infiltrate to the underlying soil.

A number of porous paving products are commercially available including:

- pavements made from special asphalts
- concrete grid pavements
- concrete, ceramic or plastic modular pavements.

Porous paving can be utilised to promote a variety of water management objectives, including:

- reduced (or even zero) peak stormwater discharges from paved areas
- increased groundwater recharge
- improved stormwater quality.
- reduced area of land dedicated solely for stormwater management.

Asphaltic paving

Asphaltic porous paving is laid on a sand/gravel sub-base over natural soil (see Figure 2).

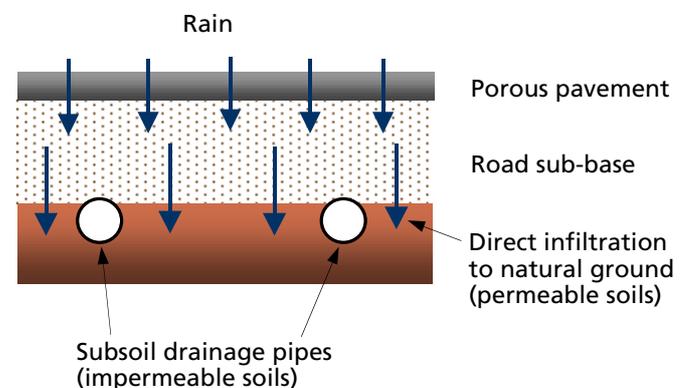


Fig 2: Asphaltic porous paving systems

Rainfall percolates through a porous asphalt layer to the road sub-base, where it is stored until it infiltrates to the surrounding soil. When installed in impermeable soils, subsoil drainage pipes are placed below the road sub-base to allow stormwater to overflow into the street drainage system.

Early porous paving, typically asphalt, relied on percolation of stormwater through the pavement and storage in the sub-base prior to infiltration to the soil. They were often subject to failure due to sediment clogging, and are less recommended than newer porous paving products.

Grid & modular paving

More recent porous paving designs overcome the deficiencies of the earlier asphalt porous paving products. They include:

- concrete grids poured in-situ
- precast concrete grids
- concrete, ceramic or plastic modular pavers.

These products generally contain surface voids that are filled with sand or gravel. Stormwater filters through these voids to a sand or gravel sub-base, thereby cleansing the stormwater. Gravel retention trenches and geotextile fabric can also be installed, thereby creating a very effective stormwater treatment chain. During heavy rain, excess stormwater overflows to the street drainage system when the trench becomes full (see Figure 3).

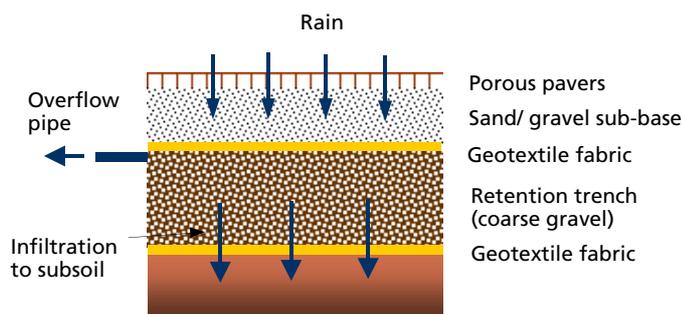


Fig 3: Grid & modular porous paving systems

Grass may also be grown in voids, but this is generally unsuccessful due to insufficient soil depth and nutrients, heavy wear and tear and retained heat in the pavers. In very low traffic areas, consider using turf rather than porous paving.

Plastic modular block pavers retain less heat than concrete ones, making them more suitable in hotter locations or climates.

Porous paving is an excellent stormwater management measure for low-traffic surfaces in driveways and car parks. Unfortunately history has shown many failures due to poor design, construction and maintenance practices. Consequently, the following design and maintenance issues need to be carefully addressed.

Clogging

Partial or total clogging with sediment and oil is a major potential cause of failure, and must be avoided. Clogging can occur during or immediately after construction, or through long-term use. The likelihood of clogging can be avoided by the following measures.

- Do not install porous paving in positions that are likely to receive large quantities of sediment and debris washed down by stormwater, or windblown sand or other material.
- Carefully protect porous paving from sediment inputs during construction.
- Do not use porous paving for accessways with high traffic volumes or with regular heavy vehicle traffic.
- Undertake regular vacuum sweeping or high pressure hosing to remove sediment (direct runoff to grassed areas).
- Install sediment traps, vegetated filter strips or specially designed gutter systems to pre-treat stormwater inputs to remove sediments.

Paving

Infiltration capacity

Porous paving sometimes has a poor reputation of having insufficient infiltration capacity. In most cases this can be attributed to sediment-induced clogging, soils with insufficient infiltration capacity and designs with insufficient storage volume. These problems can be readily overcome by using modern design practices to:

- provide a retention trench below the sub-base
- provide an overflow to the street drainage system or other stormwater management measure
- limit the runoff area contributing stormwater to the porous paving surface.

Aquifer contamination

Porous paving can, in some cases, result in a risk of contamination of shallow aquifers by toxic materials derived from asphalt, vehicular traffic and road use. This risk can be minimised or eliminated by following the following design principles.

- Do not construct porous paving over shallow aquifers.
- Do not use porous paving on streets with high traffic volumes.
- Install a sand sub-base over a retention trench with geotextile fabric lining to capture contaminants.

Structural integrity

If properly installed, porous pavements have similar load bearing and design life performance to conventional pavements. Impairment of the structural integrity of porous paving by traffic loads or heavy vehicles can be avoided by adhering to relevant design and construction specifications.

Slopes

Porous paving should not be constructed on slopes greater than 5% unless an engineering design is completed to assess the impact of the paving system on downstream environments and the stability of surrounding areas.

Unsuitable soils

Porous paving should not be placed on:

- wind blown or loose sands
- clay soils that collapse in contact with water
- soils with a hydraulic conductivity of less than 0.36 mm/hr.

Soil assessment and permeability testing should be undertaken as part of the design of porous paving.

Rock & shale

Porous paving should not be placed over rock that has little or no permeability. Studies have shown that infiltration is possible in severely weathered or fractured rock (for example, sandstone). Engineering testing is essential in these circumstances to ensure that the rock will accept infiltration. In the case of shallow soil cover, testing is required to ensure that seepage does not cause hazard or nuisance to downstream sites.

Salinity

Infiltration techniques must be avoided or carefully planned in areas affected or potentially affected by groundwater salinity.

Suitable locations

Porous paving can be utilised in streets with low traffic volumes (such as cul-de-sacs), car parks and for paving within residential and commercial development. Acceptable performance can be achieved provided that the correct design and construction procedures are followed, including any manufacturer's recommendations

Maintenance

Concrete grid, ceramic and modular plastic block pavers require less maintenance than asphaltic porous paving as they are less easily clogged. They are also easier to repair. The performance and life of these pavements can be increased by regular vacuum sweeping or high pressure hosing (once every three months) to remove sediments.

As with traditional pavements, asphalt porous paving requires occasional resurfacing. Concrete grid, ceramic and plastic modular blocks require a maintenance schedule similar to that for conventional road surfaces. This involves retaining the pavers and replacing part of the sand layer to remove contaminants.

Indicative water quality

The contaminant removal processes in porous pavements include adsorption, straining, bioreaction and microbial decomposition. Correctly designed and maintained porous paving will retain approximately:

- 80% of sediment
- 60% of phosphorus
- 80% of nitrogen
- 70% of heavy metals
- 98% of oils and greases (with a sand sub-base).

Studies show that oils and greases are subject to microbial decontamination in porous paving. The addition of sand filters and retention trenches with geotextile fabric lining (see *Practice Note 5: Infiltration Devices*) further increases the effectiveness of porous paving as a stormwater treatment measure.

Costs

Construction cost of porous paving is similar to that of traditional pavement and is less than the cost of traditional paving when savings in stormwater infrastructure is considered. Research shows that porous paving can be up to three times less expensive than traditional road and stormwater management approaches.

Construction costs for porous paving are similar to that for traditional paving materials, and are less than the cost of traditional paving when savings in stormwater infrastructure are considered. When installed as part of an integrated stormwater management system, porous paving can be up to three times less expensive than traditional road and stormwater management approaches.

Useful websites

Rocla Products: www.rocla.com.au

University of South Australia: www.unisa.edu.au

Product suppliers

Pavers: Rocla, tel 02 9892 2866

Geotextile fabric, slotted pipes and plumbing fittings: Saddingtons, tel. 02 4969 6222

Gravel: Rock-Inn, tel. 02 4968 2541

Paving

References

Argue, J.R. (2002). *On-site Retention of Stormwater: Introduction and Design Procedures*. Urban Water Resources Centre, University of South Australia, Adelaide.

Argue J. R; Gieger, W. F. & Pezzaniti D. (1998). 'Demonstration projects in source control technology: theory and practice, *Proc. Hydrastorm 98 Symposium*, Adelaide. The Institution of Engineers Australia, Canberra.

O'Brien, E.J., Rowlands, W.G., Dolton, J.H., Sibun, H.J. & Burchmore, J.J. (1992). 'Coastal stormwater discharge in selected Sydney catchments', in *International Symposium on Urban Stormwater Management*, Sydney, 129-136.

Wong, T.H.F. & Eadie, M.L. (2000). 'Water sensitive urban design: a paradigm shift in urban design', in *Proc. 10th World Water Congress*, Melbourne.

Other practice notes

Other WaterSmart Practice Notes are available in this series:

- No. 1 The WaterSmart Home
- No. 2 Site Planning
- No. 3 Drainage Design
- No. 4 Rainwater Tanks
- No. 5 Infiltration Devices
- No. 6 Paving
- No. 7 Landscape Measures
- No. 8 Landscape Practices
- No. 9 Wastewater Reuse
- No.10 Groundwater
- No.11 Site discharge index

To obtain copies, please telephone 02 4962 0918.

Principal Author: Peter Coombes. Design and Layout by Planning Plus.

This Practice Note is published by the Lower Hunter and Central Coast Regional Environmental Management Strategy (LHCCREMS) as part of its ongoing program to promote better urban water cycle management. © 2002 LHCCREMS (HROC as legal agent).



A program of the Natural Heritage Trust